

## SMART INTERACTIVE BOARD

**Model: MI-75550P**



- 4mm anti-glare toughened glass with high haze OC for clearer display against ambient light interference
- 4K Ultra HD display ,support full channel 4K UI display
- Front Type C\*1+ USB3.0\*2 + HDMI IN\*1+Touch USB\*1, supports switching with channels
- Support for Wireless projection
- 2 mm High precision infrared touch control for smooth writing
- Supports dual pens and dual colour displays for easy multi-person collaboration
- Split screen ,parallel tasks and wider scenes

# DATASHEET

## Product parameters

<b>Panel</b>	LCD Size		75"
	Type of Panel		IPS/VA
	Respond Time		8ms
	Visual Ratio		16:9
	Max Visual Area		1649.664(H)×927.936(V)mm
	Resolution		3840 (H) ×2160 (V)
	Pixel pitch		0.4296×0.4296mm
	Frequency		60Hz
	Display Colors		1.07B (10bit)
	Color saturability		72%
	Contrast ration(Typ)		4000:1
	Viewing Angle		178°(H/V)
	Light source		DLED
	Built in		48MP AI Camera and Microphone
	NFC		Screen Share
	Brightness		350cd/m2
Life Span		≥70000hrs	
<b>Audio-video parameters</b>	Speaker	Soundtrack	2.0
		Audio Distance	Built-in linear array microphone Echo reduction and smart noise- cancellation, Audio Pick-up Distance:12 meters
		Power	2×10W
<b>Touch parameter</b>	Touch specifications		Non-contact infrared sensing technology
	Support Systems		Windows10/Windows8/Windows7/WindowsXP/Android/Linux/Mac OS X/Chrome
	Touch Points		20 Points Touch
	Min.Identifier		2mm
	Input mode		Opaque object (finger, pen, etc)
	Respond time		≤10ms
	Touch depth		±1mm
	Writing height		≤3mm
	Writing display		Single Stylus pen two-colour
	Output coordinates		32767 (W) ×32767(D)
<b>System</b>	System Version		Android 14.0
	CPU		Octa-core A55*4(1.8GHz )+ A55*4 (1.8GHz )
	GPU		MaliG52 MC2_600MHz
	RAM		8GB
	ROM		128GB
<b>Wireless</b>	Bluetooth	Version	5.0
		Working	2.4GHz


# DATASHEET

<b>Wireless</b>		Frequency	
		Working Distance	0~10m
	Wi-Fi	Version	802.11ac/b/g/n/a/ax
		Working Frequency	2.4GHz/5GHz
		Working Distance	0~10m
<b>I/O interface</b>	HDMI IN		1
	TOUCH USB		1
	USB 2.0		2
	Line OUT		1
	RS232		1
	COAX/SPDIF		1
	RJ45 IN		1
	TF Card		1
<b>Front Interface</b>	USB3.0		2
	TOUCH USB		1
	HDMI IN		1
	Type C		1
<b>Power</b>	Voltage		100-240V ~ 50/60Hz 4A
	Max. power consumption		350W
	Standby power consumption		≤0.5W
<b>Structure</b>	Bare dimension		1704.4*1020.7*91.8mm
	Packing dimension		1822*245*1149mm
	Machine+wall mount thickness		118mm
	VESA hole site		800×400mm
	Wall mounting screw specifications		M8×25mm
	Net weight		56KGS
	Gross weight		70KGS
<b>Accessories</b>	Power cord		×1
	Stylus pen		×2
	Wall mount		×1

# DATASHEET

	Operation manual	×1
<b>Environment</b>	Working temperature	0°C~40°C
	Working humidity	10%~90%RH
	Storage temperature	-20°C~60°C
	Storage humidity	10%~90%RH
	Working Elevation	<5000m

## Six Side Angle product view

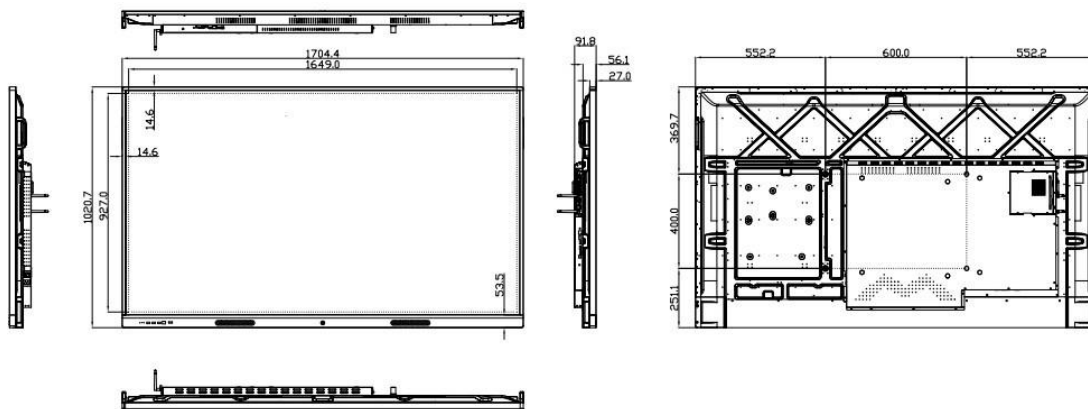

### \*Disclaimer

Due to product configuration and manufacturing process, actual body size/body weight may vary, please refer to the actual product.

The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, colour and size) may vary slightly.

Please refer to the actual product.

In order to provide accurate specifications as far as possible, the text expressions and pictures in this specification may be adjusted and revised in real time.

The product specification may be adjusted and revised in order to match the actual product performance and specifications.

In the event that such changes and adjustments are necessary, no special notice will be given.